

## DATASHEET

### MPA 105-12 MOVE - AGM



#### Application

- Wheelchairs
- Scooters, 2/3 and 4 wheels
- Electric Cars
- Cleaning Machines
- Personal Carriers
- Utility Vehicles


#### General Features

- International Standard Footprint
- Valve Regulated cells
- Low Internal Resistance
- High Initial capacity
- Non Hazardous
- Lifting handle

#### Construction

- Absorbed Glass Mat (AGM) Technology
- Pure Cyclic Design
- High Quality Valve
- Vibration resistant
- FT Terminal for easy connection

#### Dimensions

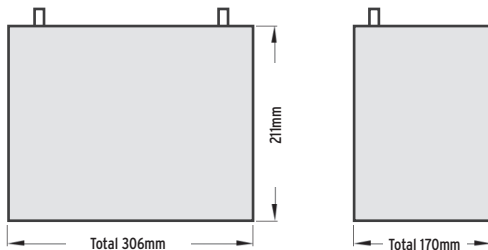

Terminal configuration: FT 6mm



Battery Model	MPG 105-12				
Cycle Life	450 cycles at 50% DOD / 320 cycles at 75% DOD				
Capacity(25 °C)	20HR	10HR	5HR	3HR	1HR
	105Ah	94Ah	85Ah	75Ah	60Ah
Discharge Current of	75Amp	25Amp	20Amp	15Amp	8Amp
Discharge time in min	47	180	238	333	670
Dimensions	Length	Width	Height	Total Height	
	306mm	170mm	- mm	211mm	
Approx. Weight	29,6 kg				
Capacity Affected	22 °C		0 °C		-10 °C