

DATASHEET
MPA 85-12 MOVE - AGM



Application

- Wheelchairs
- Scooters, 2/3 and 4 wheels
- Electric Cars
- Cleaning Machines
- Personal Carriers
- Utility Vehicles


General Features

- International Standard Footprint
- Valve Regulated cells
- Low Internal Resistance
- High Initial capacity
- Non Hazardous
- Lifting handle

Construction

- Absorbed Glass Mat (AGM) Technology
- Pure Cyclic Design
- High Quality Valve
- Vibration resistant
- FT Terminal for easy connection

Dimensions

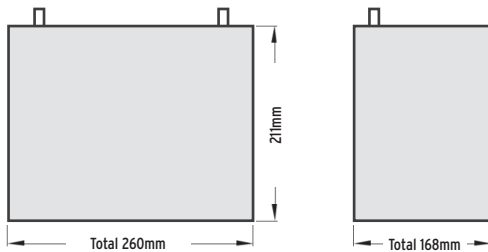

Terminal configuration: FT 6mm



Battery Model	MPA 85-12				
Cycle Life	450 cycles at 50% DOD / 320 cycles at 75% DOD				
Capacity(25 °C)	20HR	10HR	5HR	3HR	1HR
	84Ah	77Ah	69Ah	60Ah	48Ah
Discharge Current of	75Amp	25Amp	20Amp	15Amp	8Amp
Discharge time in min	32	144	198	275	570
Dimensions	Length	Width	Height	Total Height	
	260mm	168mm	- mm	211mm	
Approx. Weight	25,5 kg				
Capacity Affected	22 °C		0 °C		-10 °C