


# 8A24 HEI

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	91 Ah
Capacity at C/20	79 Ah
Capacity at C/5	69.2 Ah
Weight	53 lbs. (24 kg)
Plate Alloy	Lead Calcium
Post Seal	Epoxy-Sealed
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)
<i>Caltrans BBS temperature clause will be supported</i> Temperature and battery age effect runtime	
Charge Voltage @ 77°F (25°C)	
Charge / Absorption / Equalize	2.30 - 2.43 VPC
Float / Standby	2.23 - 2.26 VPC
Vent	Self-sealing
Terminal	C (Insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

## Valve-Regulated, Absorbed Glass Mat Technology




## DIMENSIONS

Inches (mm)

Length	10.90 (277 mm) including handle
Width	6.56 (167 mm)
Height	8.27 (210 mm)

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

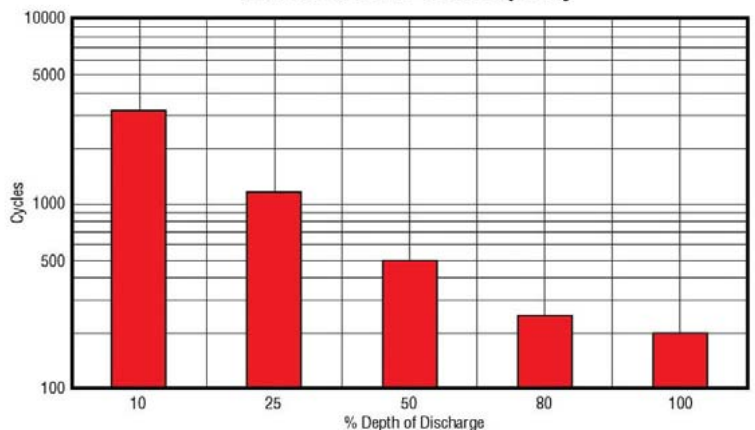

Vertrieben durch:



EMG Elektromobile GmbH & Co. KG

Beerenstraße 5 · D-33803 Steinhagen / Westf.

Telefon: 0 52 04 / 8 71 90 - 0 · Telefax: 0 52 04 / 8 71 90 - 20

info@emg-elektromobile.com · www.emg-elektromobile.com

