

M24 SLD G FT

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	84.5 Ah
Capacity at C/20	73.6 Ah
Capacity at C/5	63 Ah
Weight	52 lbs. (23.6 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	C (Insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	10.20 (259 mm)
Width	6.80 (173 mm)
Height	8.24 (209 mm)

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

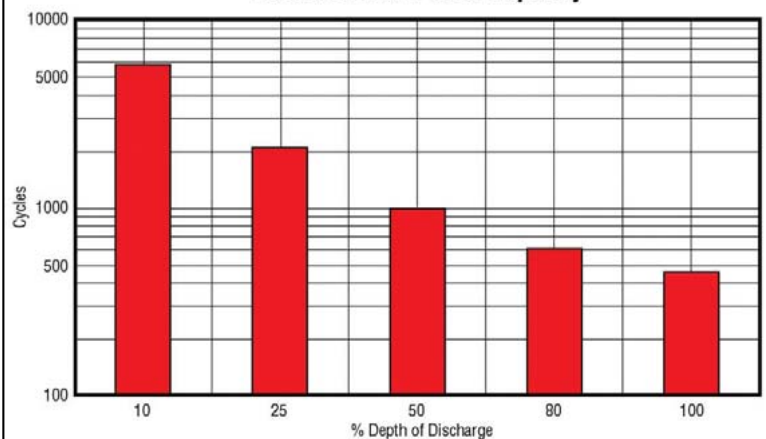

Vertrieben durch:



EMG Elektromobile GmbH & Co. KG

Beerenstraße 5 · D-33803 Steinhagen / Westf.

Telefon: 0 52 04 / 8 71 90 - 0 · Telefax: 0 52 04 / 8 71 90 - 20

info@emg-elektromobile.com · www.emg-elektromobile.com

